

Landing gears · Modul CF


Advantages at a glance

- Drop leg with telescopic lift and fixed disc
- Compact design
- Maximum lift combined with low mounting height

Technical Features

- Fixed disc
- Additional drop extension
- Full length back plate
- Reinforcement
- Also available with two side operation and special crank

Technical Specification

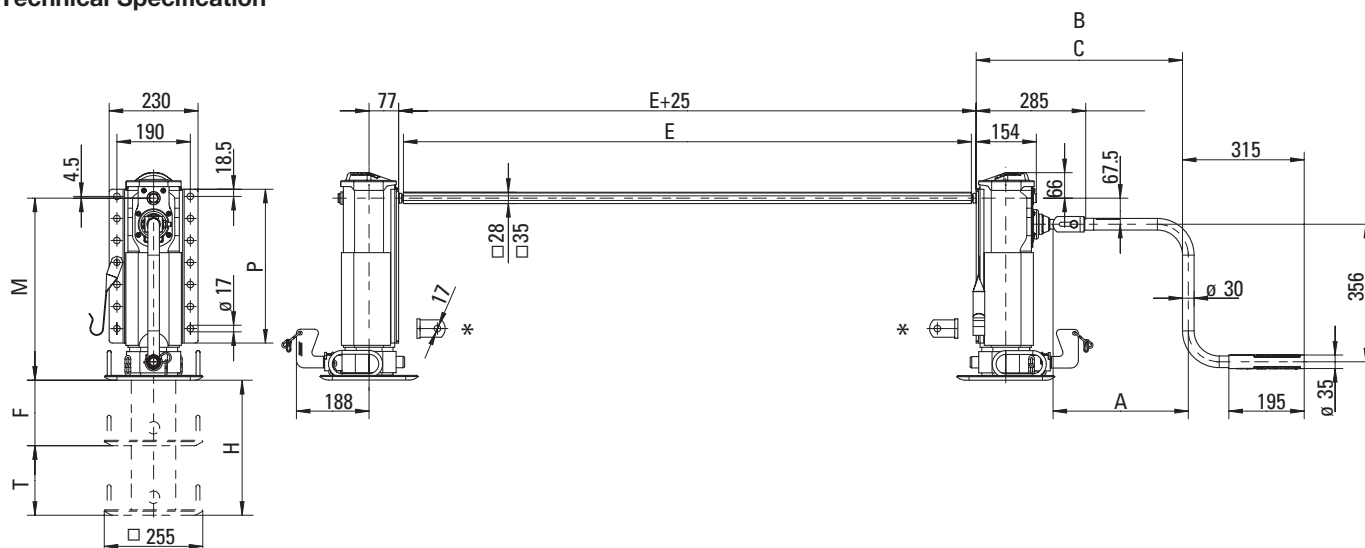

Selection table / Versions available

Order No.	M (mm)	F* (mm)	P (mm)	T** (mm)	H (mm)	Back plate	Foot
CF151470000	670	370	598	380	750	full length	T rigid
CF152470000	620	320	548	330	650	full length	T rigid
CF153470000	570	270	498	280	550	full length	T rigid
CF154470000	520	220	448	230	450	full length	T rigid
CF155470000	470	170	398	180	350	full length	T rigid

* F: drop extension (fixed)

** T: telescopic lift (stageless)

Remark:

* Brace lugs will be supplied unassembled.

Crank handles and connection shafts need to be ordered separately and are shipped unassembled.


Order numbers and dimensions of A, B, C and E can be found on page 132.

Technical Data (per kit)

Characteristic	Value
Lifting capacity	24 t
Static test load	50 t
Lift per turn of handle	
- Low gear	0,9 mm
- High gear	15,0 mm
Crank force at 16 t lifting capacity	210 N

Modul CF

Spare parts

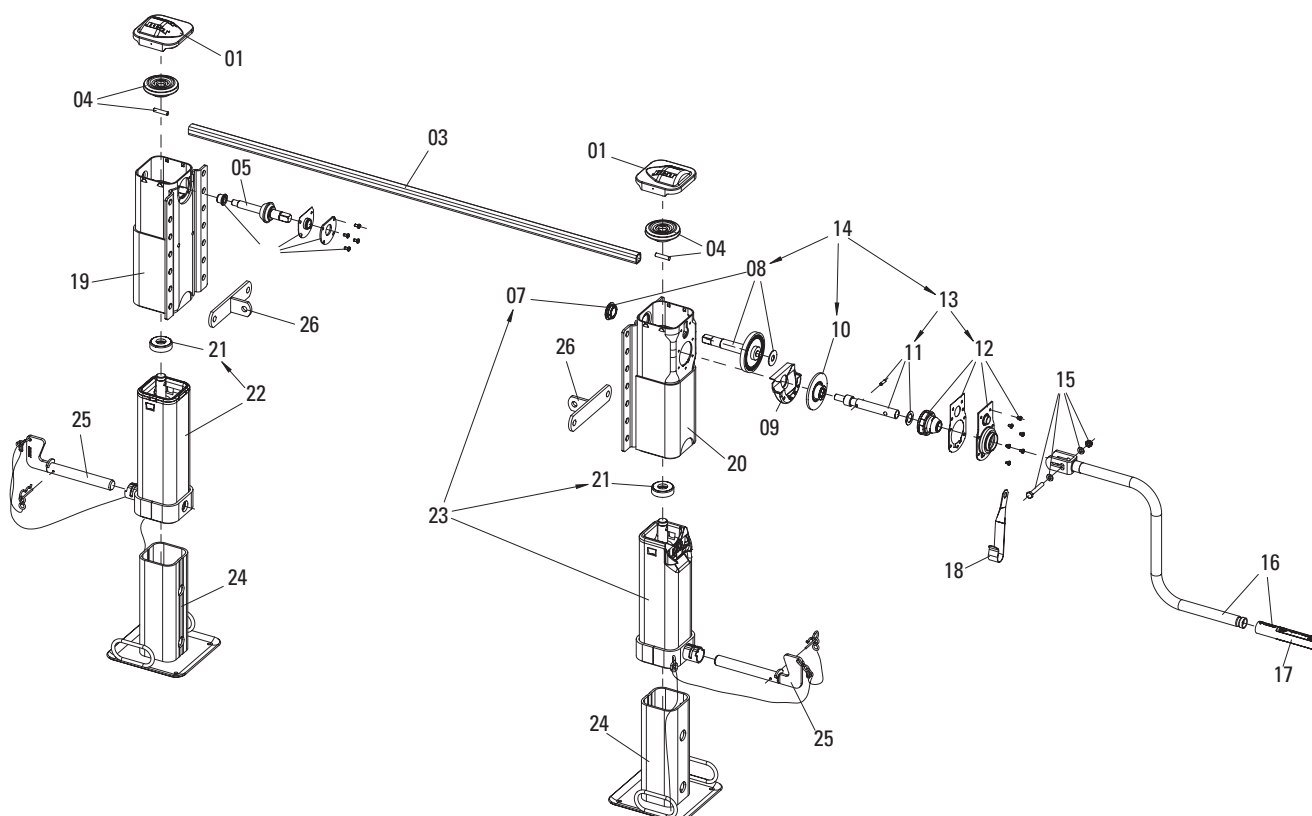

Item	Description	Remark	Order No.	per kit
01	Cover with bolts		JS E0046100	2
03	see individual components			1
04	Bevel gear with bolts		JS E0058600	2
05	Shaft		JS E0001500	1
06	Bearing	compl.	JS E0046200	1
07	Shaft		JS E0001800	1
08	Shaft with bearing		JS E0058700	1
09	Grease tank		JS E0002000	1
10	Gear		JS E0055800	1
11	Crankshaft	compl.	JS E0046500	1
12	Bearing holder	compl.	JS E0058800	1
13	Crankshaft and bearing holder	compl., with 11 + 12	JS E0056600	1
14	Drive	compl., with 08, 10 + 13	JS E0083700	1
15	Bolts, washers, nuts		JS E0043100	1
16	see individual components			1
17	Crank bushing		JS E0042700	1
18	Crank parking hook	for crank 350 mm (JS U01)	JS E0040200	1
18	Crank parking hook	for crank 415–480 mm (JS U02-JS U04)	JS E0040201	1
18	Crank parking hook	for crank 520–620 mm (JS U05-JS U08)	JS E0040202	1
19	Mh-51/670 shaft left		JS E0071303	1
19	Mh-52/620 shaft left		JS E0071304	1
19	Mh-53/570 shaft left		JS E0071305	1
19	Mh-54/520 shaft left		JS E0071306	1
19	Mh-55/470 shaft left		JS E0071307	1
20	Mh-51/670 shaft right		JS E0070603	1
20	Mh-52/620 shaft right		JS E0070604	1
20	Mh-53/570 shaft right		JS E0070605	1
20	Mh-54/520 shaft right		JS E0070606	1
20	Mh-55/470 shaft right		JS E0070607	1
21	Axial bearing		JS E0066401	2
22	Mh-51/670 inner tube l. + spindle and bearing	with 21	JS E0071503	1
22	Mh-52/620 inner tube l. + spindle and bearing	with 21	JS E0071504	1



Item	Description	Remark	Order No.	per kit
22	Mh-53/570 inner tube l. + spindle and bearing	with 21	JS E0071505	1
22	Mh-54/520 inner tube l. + spindle and bearing	with 21	JS E0071506	1
22	Mh-55/470 inner tube l. + spindle and bearing	with 21	JS E0071507	1
23	Mh-51/670 inner tube r. + spindle and bearing	with 21 + 07	JS E0070803	1
23	Mh-52/620 inner tube r. + spindle and bearing	with 21 + 07	JS E0070804	1
24	Mh-51/670 support leg with chain		JS E0072201	2
24	Mh-52/620 support leg with chain		JS E0072202	2
24	Mh-53/570 support leg with chain		JS E0072203	2
24	Mh-54/520 support leg with chain		JS E0072204	2
24	Mh-55/470 support leg with chain		JS E0072205	2
25	Pin	compl.	JS E0075000	2
26	Angle		JS E010.001	2

Individual components

Item	Description	Remark	Order No.	per kit	Item	Description	Remark	Order No.	per kit
03	Connection shaft 1340 mm		JS L01	1	16	Crank 350 mm w. parking hook	with 15, 17 + 18	JS U01	1
03	Connection shaft 1450 mm		JS L02	1	16	Crank 415 mm w. parking hook	with 15, 17 + 18	JS U02	1
03	Connection shaft 1470 mm		JS L03	1	16	Crank 450 mm w. parking hook	with 15, 17 + 18	JS U03	1
03	Connection shaft 1500 mm		JS L04	1	16	Crank 480 mm w. parking hook	with 15, 17 + 18	JS U04	1
03	Connection shaft 1505 mm		JS L05	1	16	Crank 520 mm w. parking hook	with 15, 17 + 18	JS U05	1
03	Connection shaft 1575 mm		JS L06	1	16	Crank 570 mm w. parking hook	with 15, 17 + 18	JS U07	1
03	Connection shaft 1605 mm		JS L07	1	16	Crank 620 mm w. parking hook	with 15, 17 + 18	JS U08	1
03	Connection shaft 1635 mm		JS L08	1					
03	Connection shaft 1700 mm		JS L09	1					
03	Connection shaft 1790 mm		JS L10	1					